


ANLEITUNG

Substrate preparation


Contact layers on smooth, non-absorbent substrates

As an alternative to priming, it is also possible to create contact layers produced from cement-based and highly polymer-modified materials. This method is particularly suitable when pre-treating smooth, non-absorbent substrates in exterior areas, such as old tiles on balconies and terraces. Smooth concrete surfaces are also ideal to be prepared in this way. BOTAMENT MD 1 Speed Flexible sealing slurry is excellent for this purpose and application is simple.

BOTAMENT[®]
SYSTEMBAUSTOFFE 

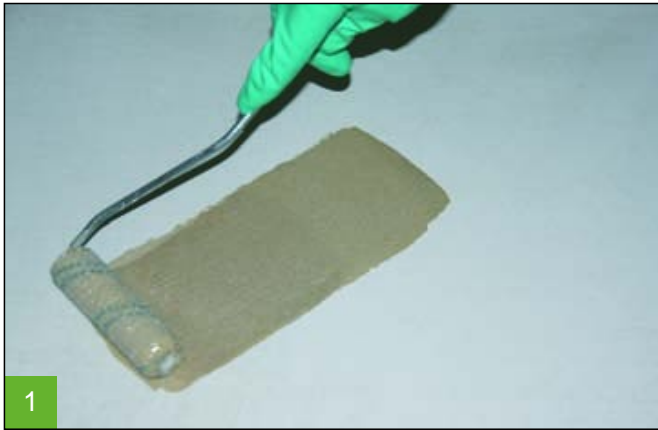

Application of **BOTAMENT Multiprimer R 20** onto a calcium sulphate screed that needs to be protected against moisture penetration from the rear.

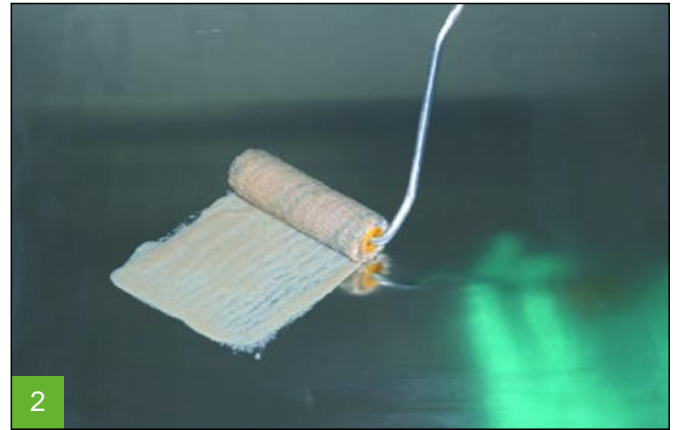

Roll **BOTAMENT Multiprimer R 20** onto the cleaned steel plate.



Installation of a bonding course with **BOTAMENT MD 1 Speed** onto an existing terrace cover.



Application of the sealant (in two layers) **BOTAMENT MD 1 Speed** also integrating a **BOTAMENT SB 78** system sealing tape and an interior corner.